

**NIKKOREX** .....

*Nikkorex-8*  
*movie cameras*

*Nikkorex*  
*35 mm cameras*  
*and*  
*accessories*



## NIKKOREX-35

*35mm Reflex by NIKON  
Coupled exposure meter,  
Nikkor lens,*



**NIKKOREX CAMERA**—35mm single lens reflex; 36-exposure; 1 x 1½; complete with image-erecting porro-mirror finder. Features 50mm f2.5 Nikkor lens; built-in, coupled meter with meter pointer visible in finder window (outside field of view) and in window on top of camera, permitting setting of correct exposure while actually viewing through camera; settings can be made independently of meter. When camera is fired, diaphragm automatically closes down and mirror automatically moves up; a single stroke of the film advance lever winds film, sets exposure counter, reopens diaphragm to full aperture and returns mirror to viewing position. Unique porro-mirror finder is lighter more compact than conventional prism. Built-in ground glass with rangefinder; shutter speeds to 1/500 plus B; self timer; full synch at all speeds with flash and electronic flash; auto-reset exposure counter; high speed rewind; tripod socket built into body; accepts 35mm wide angle and 90mm telephoto conversion lenses.

- CA10001 Nikkorex Reflex Model with 50mm f2.5 lens
- CC10401 Leather Eveready Case, for Nikkorex
- LN10251 35mm f5.6 wide angle conversion lens, w/leather case
- LN10301 90mm f5.6 telephoto conversion lens, w/leather case
- AC10710 Polarizing Filter screw in, rotating mount; 40.5mm
- AC2208 Filter screw-in, 40.5mm, medium yellow
- AC2209 Filter screw-in 40.5mm, green
- AC2210 Filter screw-in, 40.5mm, red orange
- AC2211 Filter screw-in, 40.5mm U. V haze
- AC2212 Filter screw-in, 40.5mm, 85C
- AC2213 Filter screw-in, 40.5mm, skylight
- AC2214 Filter screw-in, 40.5mm, 82A
- AC10701 Close-up attachment, screw-in; range: 12" to 24"
- AC10601 Lens hood, with case, for 50mm f2.5
- AC10610 Lens hood, with case, for 35mm f5.6 converter
- AC10620 Lens hood, with case, for 90mm f5.6 converter
- AC10801 Front lens cap for 50mm f2.5
- AC10802 Front lens cap for 90mm & 35mm conversion lenses
- AC10813 Rear lens cap for 90mm & 35mm conversion lenses
- FL356 BC-6 Flash Attachment, for Nikkorex

- New 35mm single lens reflex by Nikon
- Features same Nikkor lens optical quality that helped make Nikon famous—50mm f2.5
- Built-in coupled exposure meter visible in finder, assures perfect exposures every time.
- Unique Porro-Mirror finder, automatic diaphragm, and other fine camera features make this one of the best camera values in the field today

The Nikkorex 35 reflex offers your prospects the features, construction and performance found only in cameras selling for nearly double the price. A demonstration will prove it.

Let your customer look through the unique porro mirror finder. Point out the convenience of the 'off-side' finder eyepiece, and how the porro system helps make the camera lighter and more compact.

Let him see how easily the built-in, coupled meter can be used to set the correct exposure — while still looking through the finder. Be sure he notices that the meter 'reading' can also be seen in a window on top of the camera. Let him operate the film advance which, with a single stroke, advances film, 'counts' exposure, winds shutter, reopens diaphragm and returns mirror to position.

Now let him shoot a roll of film. The superb Nikkor lens — choice of professionals everywhere — will give him magnificent color and sparkling black and white shots — unmatched by any other optics.

Now notice how easily you can close the sale.

### AUTOMATIC STOP-DOWN DIAPHRAGM

*Lens is wide open for brightest possible image to focus and compose. Automatically closes down to taking aperture.*

As you advance the film for the next picture the diaphragm reopens fully and the mirror returns to focusing and viewing position.

### 1. ASA SELECTOR

*Ranges from ASA 10 to 1600.*

### 2. HINGED BACK

*More convenient loading and unloading*

### 3. AUTOMATIC ELECTRIC EYE

*See illustration)*

### 4. NECKSTRAP RING

### 5. EXPOSURE COUNTER

*Automatically resets when camera is opened.*

### 6. BODY RELEASE

*Also threaded to accept standard cable release.*

### 7. SINGLE STROKE FILM LEVER

*Advances film, sets shutter returns mirror and reopens diaphragm.*

### 8. EXTERNAL METER WINDOW

*Permits setting of shutter and diaphragm while looking through finder. Shows meter reading seen in finder window.*

### 9. ACCESSORY SHOE

### 10. REWIND CRANK


*Permits high speed film rewind. Folds flush when not in use.*

### 11. NECKSTRAP RING

### 12. STANDARD PC FLASH TERMINAL

*MX flash synchronization at all speeds from 1 second to 1/500, Plus B and delayed action. Single terminal, conveniently located.*



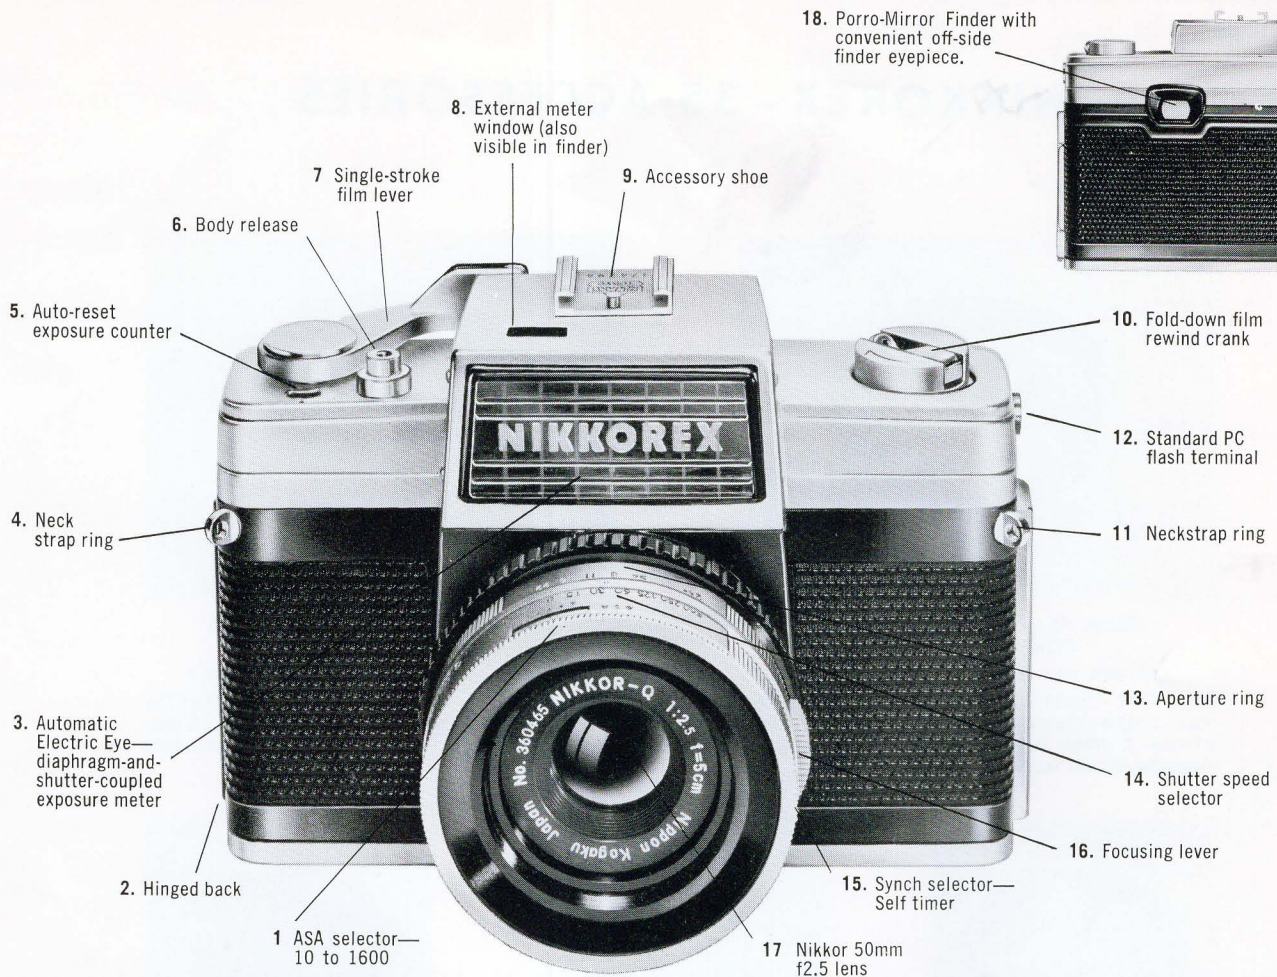

## - FEATURES

### 13. APERTURE RING

Sets Lens openings 2.5, 4, 5.6, 8, 11, 16, 22.  
(See automatic stop-down diaphragm)

### 14. SHUTTER SPEED SELECTOR

Sets shutter speeds 1, 1/2, 1/4, 1/8, 1/15, 1/30, 1/60, 1/125, 1/250, 1/500, "B"

### 15. SYNCH-SELECTOR—SELF TIMER

Marked for M & X synch • "V" marking sets delayed action up to 6 seconds.



### 16. FOCUSING LEVER

### 17. NIKKOR 50mm f2.5 LENS

See illustration)

### 18. UNIQUE PORRO MIRROR MIRROR FINDER SYSTEM

See illustration)

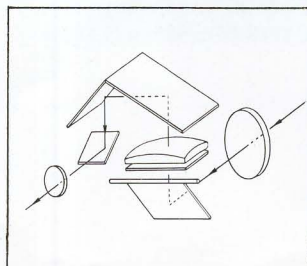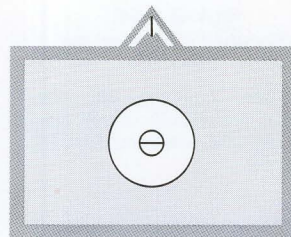

### 3. AUTOMATIC ELECTRIC EYE

Cross coupled to apertures and shutter speeds • ASA film Range 12 to 1600 • Indicator needle visible in finder and on top of camera.

Correct exposure can be set without removing eye from camera; select shutter speed and then turn aperture ring until meter needle indicator moves into reference position. Needle indicator located outside of picture field.

### 17. NIKKOR 50mm f2.5 LENS


Same high quality as in famous Nikon 35mm cameras Sharp, fully corrected, for superb color and sparkling black and white shots • Focuses from 24" to infinity

### 18. UNIQUE PORRO MIRROR FINDER SYSTEM

Lighter, more compact than conventional prism systems • Convenient 'off-side' eyepiece • Brilliant ground glass viewing, split prism rangefinder



## NIKKOREX-35 ACCESSORIES

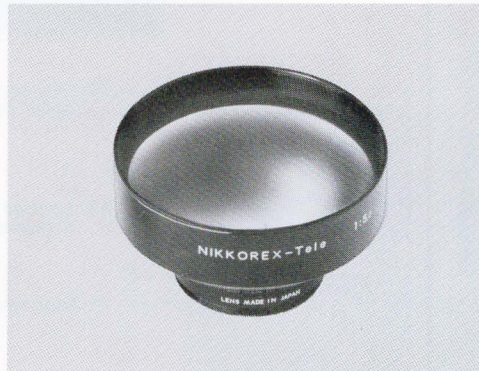

**90mm f5.6 NIKKOR TELEPHOTO  
CONVERSION LENS**

*Supplied with lens caps and leather case*


**LN 10301**—Screws into 50mm camera lens. Provides approximately 2X magnification. 27° angle of view. Camera finder shows exact field of view. Accepts 69mm screw-in hood.



**35mm f5.6 NIKKOR WIDE-ANGLE  
CONVERSION LENS**

*Supplied with lens caps and leather case*

**LN 10251**—Screws into 50mm camera lens for wide angle photography 64° angle of view. Camera finder shows exact field of view. Accepts 69mm screw-in hood.

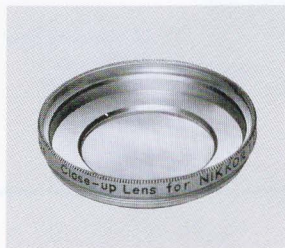

**CLOSE-UP ATTACHMENT**

**AC 10701**—Allows close focusing from 24" to 12". Screws into 50mm camera lens. Viewfinder shows exact field of view.



**FLASH GUN**

*Supplied with Case and Capacitor*

**FL 356**—Compact BC unit. Takes AG-I bulb. Flash cord connection. Uses standard BC battery.



**LENS CAPS**

**AC 10801** Front lens cap for 50mm f2.5 lens

**AC 10802** Front lens cap for 35mm and 90mm f5.6 lenses

**AC 10813** Rear lens cap for 35mm and 90mm f5.6 lenses



**FILTERS**

*40.5mm screw-in.  
Fit normal lens*

**AC 10710**—Polarizing filter  
Rotating mount  
**AC 2208**—Medium yellow filter  
**AC 2209**—Green filter  
**AC 2210**—Red-orange filter  
**AC 2211**—U.V. haze filter  
**AC 2212**—85C filter  
**AC 2213**—Skylight filter  
**AC 2214**—82A filter



**LENS HOODS**

*Screw-in. Supplied with Case*

**AC 10601** Fits 50mm f2.5 lens

**AC 10610** Fits 35mm f5.6 lens

**AC 10620** Fits 90mm f5.6 lens



**LEATHER EVEREADY CASE**

*Supplied with Adjustable  
Shoulder Strap*

**CC 10401**—Black, top grain cowhide; plush lined. Snap on front permits use of camera while still in case. Bottom tightening nut is threaded, so camera can be used on tripod without removing case.



## NIKKOREX-8

*All Electric,  
Fully Automatic  
8mm Movie Camera  
by NIKON*



- Smart, slim, pocket-size compact, fits pocket or purse.
- Simply push the button and get perfect movies automatically
- Requires no camera settings, adjustments, winding.
- Features fabulous Nikkor lens (10mm f1.8) acknowledged the finest in 35mm photography

Every customer who enters your store is a prospect for the Nikkorex 8 by Nikon.

If he never handled a camera before, the Nikkorex 8's "no-wind, no-settings, no-focusing" simplicity will sell him.

If he is a more advanced amateur, the Nikkor lens quality and 'made by Nikon' label will close the sale.

The camera's unique, pocket-size compactness and its remarkable, under \$80 price tag, coupled with its fully automatic operation, make it ideal for women, too.


The Nikkorex 8 offers opportunities for attractive accessory sales. A 2X tele-converter, remote control attachment and battery tester also add to the camera's sales appeal.

**NIKKOREX-8 MOVIE CAMERA**—Compact (5 $\frac{1}{8}$ " x 3 $\frac{3}{4}$ " x 1 $\frac{3}{8}$ ") light-weight (22 $\frac{1}{2}$  oz.) 8mm movie camera; can be carried in coat-pocket or pocketbook.

Accepts 25 ft. standard double-8 film; features Nikkor 10mm f1.8 fixed focus lens with apertures to f16. Built-in fully automatic electric eye exposure meter; apertures can also be set manually. Electric-motor film drive eliminates winding; powered by four penlight batteries. 16 FPS. ASA 5 to 100. Built-in U.V filter Film counter resets to zero automatically. View-finder folds flat to camera side; Galilean, 0.6X magnification; includes finder masks for 10mm and 20mm lenses. Provision for remote operation and tele-conversion lens.

- CA12001** Nikkorex-8 Movie Camera with Nikkor 10mm f1.8 lens
- LN12100** Telephoto Conversion Lens; 20mm; w case
- AC12500** Wrist Strap for camera; swivel action
- AC12515** Remote Control, electric motor release, with 16 ft. connecting cord
- AC12520** Battery Voltage Tester; miniature, for Nikkorex-8
- CC12401** Soft Leather Carry Case with shoulder strap; for camera only
- CC12402** Compartment Case; for Nikkorex-8 camera, conversion tele lens, one roll of film and sundries
- AC12600** Filter screw-in, 15mm, for f1.8 camera lens; #85
- AC12621** Filter screw-in, 34.5mm, for Tele lens; #85
- AC12537** Batteries, manganese (Mallory); set of 4 for motor drive
- AC12535** Battery, mercury (Mallory); replacement, for exposure meter

## FEATURES




### 4. AUTOMATIC ELECTRIC EYE

*Cadmium sulphide cell • ASA film range 5 to 100 • Coupled to diaphragm.*

Eye goes into action as soon as operating button is pressed automatically sets lens aperture for correct exposure continually changes aperture to compensate for light changes while filming. Operates indoors or outdoors.

Note: When using film with high ASA speed, use the 15mm ND4 filter to compensate.

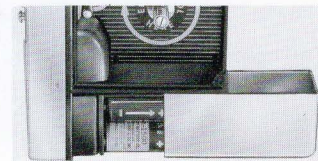


### 8. AUTOMATIC ELECTRIC MOTOR DRIVE

*Runs on 4 standard penlite batteries • Batteries good for up to 25 rolls.\**

Eliminates bothersome spring-winding between scenes and spring running out or slowing down while filming. Powerful micro-motor runs camera as long as operating button is depressed.

\*Mallory Manganese-type batteries recommended for maximum life and performance.



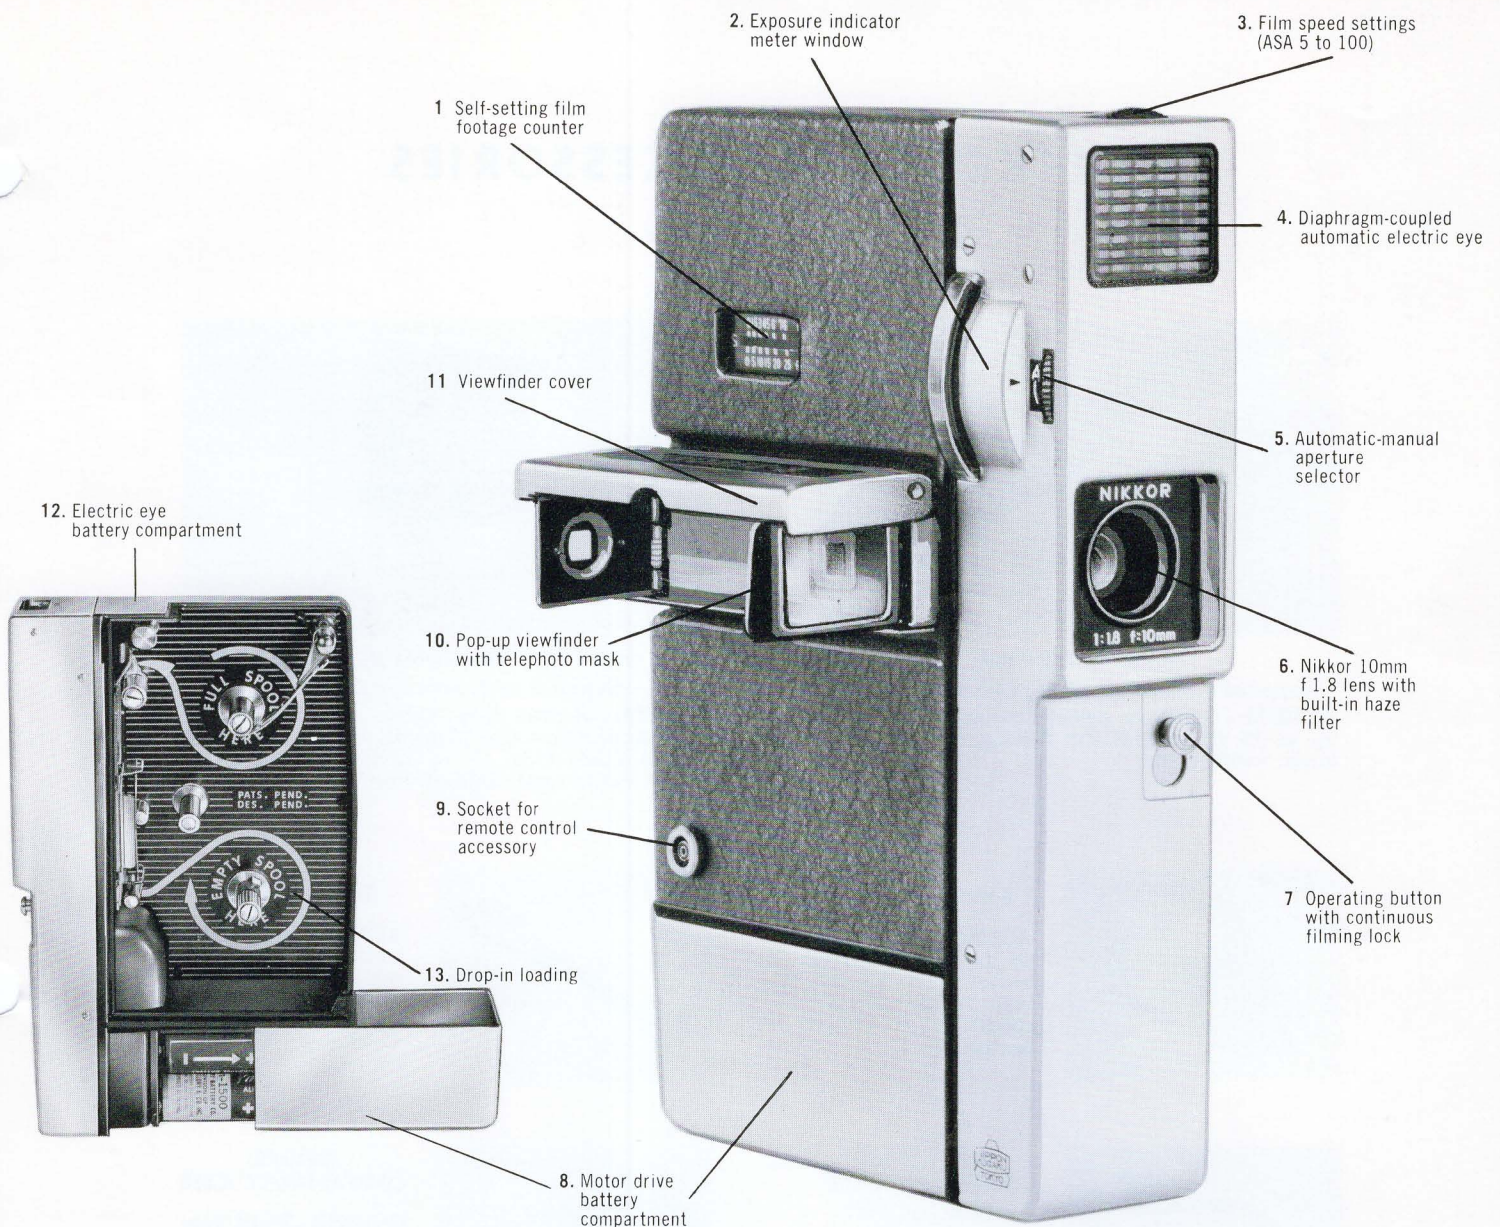


- 1 **FILM FOOTAGE COUNTER** *Automatically resets to zero.*
2. **EXPOSURE INDICATOR-METER WINDOW**  
*Shows aperture. Indicates if there is enough light to shoot by.*
3. **FILM SPEED SETTINGS** *ASA 5 to 100.*
4. **AUTOMATIC ELECTRIC EYE** *(See illustration)*
5. **AUTOMATIC-MANUAL APERTURE SELECTOR**  
*By-passes automatic electric eye. Lets you set lens aperture for any desired opening. Electric eye then acts as exposure meter. Re-set control to A, for automatic operation.*
6. **NIKKOR 10mm f1.8 LENS** *(See illustration)*
- 7 **OPERATING BUTTON-CONTINUOUS RUN LOCK** *Press the button and camera operates. Push button down it locks in position and keeps camera running indefinitely without photographer*
8. **ELECTRIC MOTOR DRIVE** *(See illustration)*
9. **SOCKET FOR REMOTE CONTROL ACCESSORIES**  
*Permits operating camera with remote control unit (see Accessories). Facilitates use in underwater photography, etc. Also used with battery tester.*
10. **POP-UP VIEWFINDER**  
*Galilean finder with 0.6X magnification; auxiliary mask gives the correct field-of-view for 20mm (2X) telephoto.*
- 11 **VIEWFINDER COVER**
12. **ELECTRIC EYE BATTERY COMPARTMENT**
13. **DROP-IN LOADING** *Camera uses standard 8mm roll film.*



6. **NIKKOR 10mm f1.8 LENS**  
*Same high quality as in famous 35s • f1.8 speed permits movies even in poor light • 10mm focal length gives wider picture coverage, eliminates focusing • Sharp from 3' to infinity.*  
Wider coverage of 10mm Nikkor is ideal for indoor movies where space is limited, and outdoors. Lens has built-in haze filter. Accepts 2X telephoto conversion lens (see Accessories)




## NIKKOREX-8 ACCESSORIES

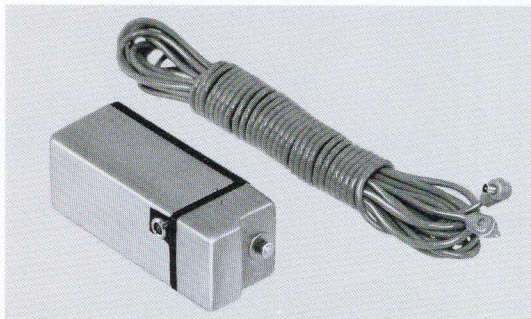


### REMOTE CONTROL

*Supplied with case and 16 ft. connecting cord*  
**AC12515**—Operates camera from any distance up to 16 feet. Ideal for filming children, pets, birds, wildlife, etc.

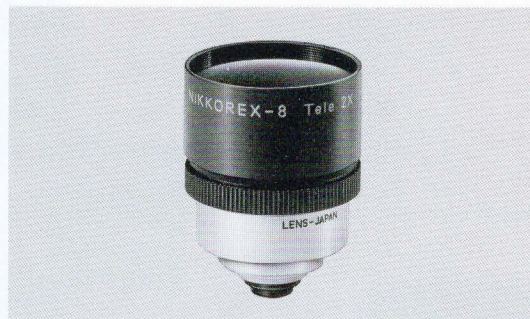

### 20mm (2X) TELE-CONVERSION LENS

*Supplied with case and lens caps*  
**LN12100**—Screws into 10mm camera lens for 2X magnification. Combination retains f1.8 speed, and is sharp from 17' to infinity. Tele-mask in finder shows exact field-of-view

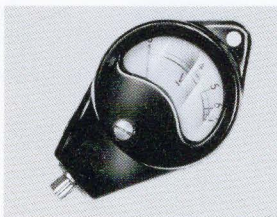

### BATTERY TESTER

**AC12520**—Plugs into remote control socket for instant test reading as to condition of motor batteries.




### WRIST STRAP

**AC12500** Braided leather. Screws into camera tripod socket. Convenient for carrying camera and for steadying it when filming.




### SOFT LEATHER TRAVELING CASE

*Supplied with adjustable shoulder strap*  
**CC12401** Smart, zippered, black top-grain leather case. Holds camera only. Plush lined.

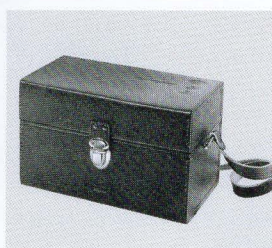

### DELUXE COMPARTMENT CASE

**CC12402**—Hard, top-grain leather case; holds camera, tele-conversion lens, remote control attachment, battery tester, filters, spare film and batteries, etc.

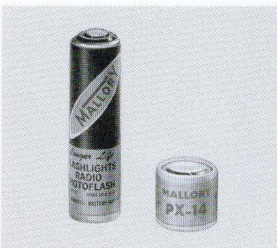

### BATTERIES

**AC12537** Manganese-type, for motor drive. Standard penlight size. Furnished in sets of 4.  
**AC12535** Mercury-type; replacement, for electric eye.



### FILTERS

*Furnished in screw mounts.*  
**AC12600** No. 85; 15mm; fits normal lens.  
**AC12621** No. 85; 34.5mm; fits tele-conversion lens.  
**AC12601**—ND4; permits use of ASA 25 film in bright sunlight. Makes equivalent of ASA 10. Fits normal lens.